




DEACON[®]

INJECTABLE PACKINGS. THE IDEAL ALTERNATIVE TO TRADITIONAL BRAIDED PACKINGS.

BENEFITS:

- Stops leaks without shutting down
- Eliminates fugitive emissions
- Reduces operating torque while maintaining a leak-free seal
- Lowers energy and operating costs
- Extends equipment life
- Never needs removal
- Flows to fill imperfections
- Eliminates downtime
- Can be hand-packed or injected

MOLDABLE INJECTABLE PACKINGS

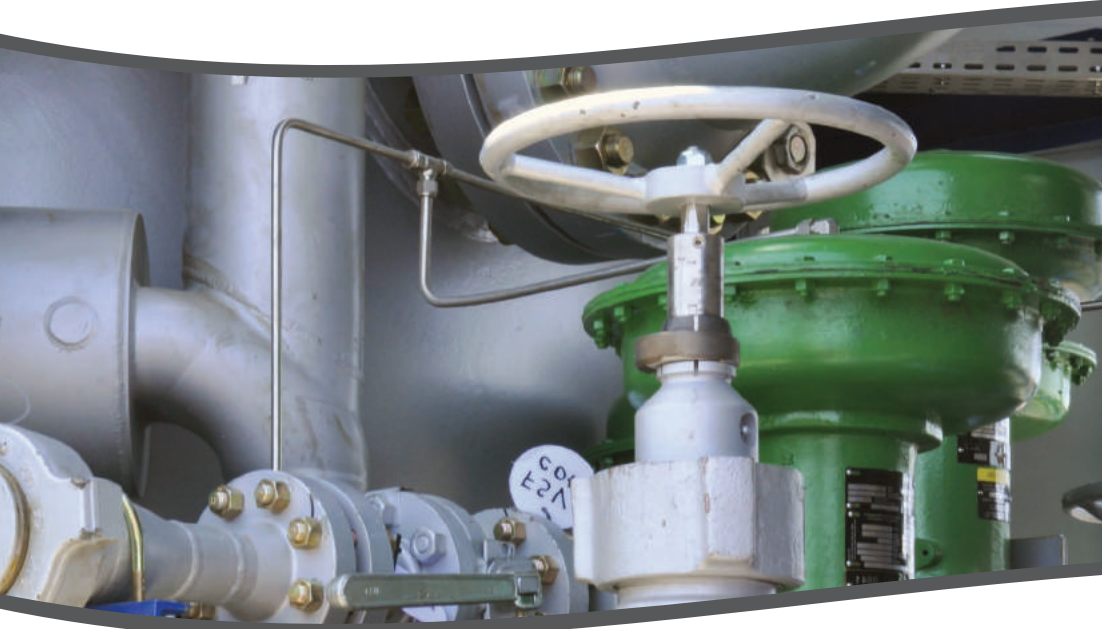

Control Leakage on:

Pumps • Valves • Stuffing Boxes • Rotating Shafts

Valve Packings

DEACON® 5013

PTFE Sealant / Packing

-150°F (-101°C) to 450°F (232°C)

Solid Content 100% PTFE Fibers, Fillers, Lubricant Base

DEACON® 5044

PTFE Sealant/Packing

-25°F (-32°C) to 450°F (232°C)

Solid Content 100% PTFE Fibers, Fillers, Very Fibrous

DEACON® 360-FG

Food Grade Sealant/Packing

-50°F (-46°C) to 450°F (232°C)

Solid Content 100% Food Grade PTFE Fibers, Fillers

DEACON® 370-OX

Oxygen Grade Sealant/Packing

-50°F (-46°C) to 400°F (204°C)

100% PTFE Solids, Non-Reactive Carrier

DEACON® 4501

Chlorine Grade Sealant/Packing

-50°F (-46°C) to 400°F (204°C)

100% PTFE Solids, Non-Reactive Carrier

DEACON® 5500

Extreme Pressure Resistant Sealant/Packing

-50°F (-46°C) to 450°F (232°C)

High Chemical Resistance, Excellent Lubrication

DEACON® 4437

Graphite, Aramid Fibers, PTFE Mix

-40°F (-40°C) to 450°F (232°C)

Sealant/Packing, Chemicals, Steam, Mild Acids, Water

DEACON® 5003

General Purpose Sealant/Packing

-25°F (-32°C) to 600°F (316°C)

Lubricant Base, Low Pressure Applications, Sewage, Steam

DEACON® 2018

V.O.C. Service Sealant/Packing

-30°F (-34°C) to 1200°F (649°C)

Graphite Based, Fibrous, Lubricating, No V.O.C.'s

DEACON® 2121

V.O.C. Service Sealant/Packing

-30°F (-34°C) to 1200°F (649°C)

100% Graphite Solids, Lubricating, No V.O.C.'s

Pump Packings

DEACON® PUMP 99

PTFE Based Lubricating Pump Packing

-50°F (-46°C) to 450°F (232°C)

Contains Lubricating Lead Shot, Excellent Sealing Capabilities

DEACON® PUMP 77

PTFE Based Lubricating Pump Packing

-50°F (-46°C) to 450°F (232°C)

Non-Staining, High Chemical Resistance, Fibrous Packing

DEACON® PUMP 44

Graphite Based Lubricating Pump Packing

-100°F (-73°C) to 1000°F (538°C)

Extreme Temperature Resistance, Remains Pliable, Protects Against Rust and Corrosion

deaconindustries.com
sales@deaconindustries.com

800.552.2896

724.225.8008

Follow us on



JET-LUBE®

